

TECHNICAL SPECIFICATION

REPAIR OF EXISTING HORIZONTAL SIGNAGE AT DBP PAGADIAN BRANCH

I. Specifications:

- Single face lighted signage
- Signage Size: 10,000mm x 965mm x 200mm (verify actual measurement)
- Panagraphics with translucent film sticker
- Complete with LED lighting fixture and timer (signage should be well lighted)
- Existing B.I. tubular framing to be retained
- Signage casing should be lift-up type
- Color Code: for back ground – 3630-157 Sultan Blue; 3630-73 Dark Red

Font:

- | | | |
|---------------------------------------|---|------------------------|
| - For 'DBP' | - | Friz Quadrata (Medium) |
| - For 'Dev't Bank of the Philippines' | - | Helvetica Black |
| - For 'Branch Name' | - | Helvetica Black |

Dimensions: See attached plan and elevation

II. Conditions of the Contract:

1. The Supplier shall ensure that the items delivered are in accordance with the specifications required by DBP. DBP has the right to reject delivery if items/s delivered were found to be defective and not according to the required specifications / model.
2. The DBP may terminate/cancel the Purchase Order (PO)/Notice to Proceed (NTP) when the Contractor fails to deliver, perform and comply with its obligation.
3. **Delivery Period:** The Supplier shall complete the supply and delivery of the Horizontal Signage within twenty (20) calendar days after receipt of Purchase Order (PO) / Notice to Proceed (NTP).
4. **Point of Delivery:** DBP Building, Rizal Avenue, Balangasan, District Pagadian City
5. **Warranty:** One (1) year warranty upon acceptance of works by DBP.

III. Payment:

1. One-time, full payment shall be issued upon completion of all works.
2. When the Supplier fails to satisfactorily deliver goods under the contract within the specified delivery schedule, inclusive of duly granted time extensions, if any, the Supplier shall be liable for damages for the delay and shall pay DBP liquidated damages, not by way of penalty, an amount equal to one-tenth (1/10) of one percent (1%) of the cost of delayed goods scheduled for delivery for every day of delay until such goods are finally delivered and accepted by DBP as stated in the Revised IRR Annex E of R.A. 9184

IV. OGCC Review:

All agreements to be executed by the parties in relation to the project/transaction shall be subject to prior review/clearance of the Office of the Government Corporate Counsel (OGCC).

Notes:

1. Contractor must conduct an inspection and verify the actual measurements on-site.
2. Contractor must touch-up, repair or replace damages made on new or existing bank properties before substantial completion.
3. Contractor must remove left over materials and debris from work area.
4. Contractor must comply with COVID-19 protocols inside DBP premises.

Prepared by:

SIGNED

MARVIN ANTHONY D. LUCAS
PDO II, Project and Contracts Management Unit

Recommended by:

SIGNED

ENGR. EDWIN C. DIZON
Officer-In-Charge, VizMin Team Head, PCMU-CFMD
Per Office Order No. 276 dated 27 June 2022


SIGNED

AM MICHAEL ANTOLIN F. CANCIO
Acting Head, PCMU-CFMD
Per Office Order No. 276 dated 27 June 2022

Approved by:

SIGNED

Acting Head, Construction and Facilities Management Department
Per Office Order No. 276 dated 27 June 2022

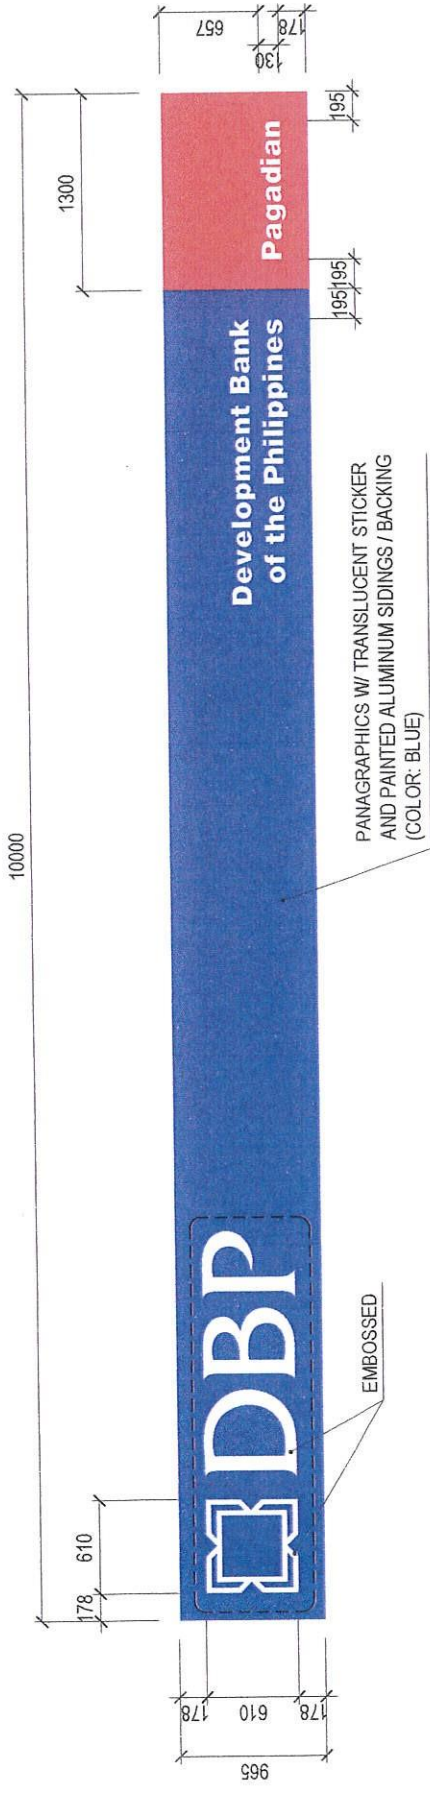

F R O N T

SPECIFICATIONS :


- SINGLE FACE LIGHTED SIGNAGE
- SIZE: 10000mm x 965mm x 200mm
- PANAGRAPHS WITH TRANSLUCENT FILM STICKER
- COMPLETE WITH LED LIGHTING FIXTURE AND TIMER (SIGNAGE SHOULD BE WELL LIGHTED)
- EXISTING B.I. TUBULAR FRAMING TO BE RETAINED
- COLOR CODE :
FOR BACKGROUND - 3630-157 SULTAN BLUE, 3630-73 DARK RED

FONT :

- FOR 'DBP'FRIZ QUADRATA
- FOR 'Dev't Bank of the Philippines'HELVETICA BLACK
- FOR 'BRANCH NAME'HELVETICA BLACK

NOTE:

- VERIFY ACTUAL MEASUREMENT PRIOR TO FABRICATION
- SIGNAGE SHOULD BE WELL LIGHTED
- KINDLY OBSERVED PROPER SCALING (I.E. TEXT HEIGHT, TEXT SPACING)
- ALL DECALS FOR THE SIGNAGE SHOULD BE COMPUTER CUT

 DEVELOPMENT BANK OF THE PHILIPPINES	PROJECT TITLE: REPAIR OF EXISTING HORIZONTAL SIGNAGE AT DBP PAGADIAN BRANCH	APPROVED BY:
SIGNED		SHEET NO: A 1
LOCATION: DBP BLDG., RIZAL AVE., BALANGASAN, DISTRICT PAGADIAN CITY		ISSUE DATE: August 15, 2022 REVISION DATE: REVIEWED BY: M.A. CANCIO E. DIZON