



Bid Notice Abstract

Request for Quotation (RFQ)

Reference Number 9720278
Procuring Entity DEVELOPMENT BANK OF THE PHILIPPINES - REGION VI
Title Signature Cabinet/Rack and Testing of Automatic Transmission Switch for Generator - DUMAGUETE BRANCH
Area of Delivery Negros Oriental

Solicitation Number:	BBG-WV#005-2023	Status	Active
Trade Agreement:	Implementing Rules and Regulations	Associated Components	2
Procurement Mode:	Negotiated Procurement - Small Value Procurement (Sec. 53.9)	Bid Supplements	0
Classification:	Goods	Document Request List	1
Category:	Office Equipment	Date Published	06/05/2023
Approved Budget for the Contract:	PHP 380,000.00	Last Updated / Time	06/05/2023 00:00 AM
Delivery Period:	15 Day/s	Closing Date / Time	12/05/2023 01:00 AM
Client Agency:			
Contact Person:	Jesse Belle Temporosa Lirazan BAC Secretariat Cor. Lacson-South Capitol Road Bacolod City Negros Occidental Philippines 6100 63-34-4334284 63-34-4349177 wvbg@dbp.ph		

Description

Supply, Delivery and Installation of Signature Cabinet/Rack
ABC Php 260,000.00

Supply, Delivery, Installation and Testing of Automatic Transmission Switch for Generator
ABC Php 120,000.00

Line Items

Item No.	Product/Service Name	Description	Quantity	UOM	Budget (PHP)
1	Supply, Delivery and Installation of Signature Cab	Supply, Delivery and Installation of Signature Cabinet/Rack	1	Unit	260,000.00
2	Supply, Delivery, Installation and Testing of Auto	Supply, Delivery, Installation and Testing of Automatic Transmission Switch for Generator	1	Unit	120,000.00

Date Created 04/05/2023



The PhilGEPS team is not responsible for any typographical errors or misinformation presented in the system. PhilGEPS only displays information provided for by its clients, and any queries regarding the postings should be directed to the contact person/s of the concerned party.

© 2004-2023 DBM Procurement Service. All rights reserved.

[Help](#) | [Contact Us](#) | [Sitemap](#)

TECHNICAL SPECIFICATION SIGNATURE CARD CABINET

Specification:

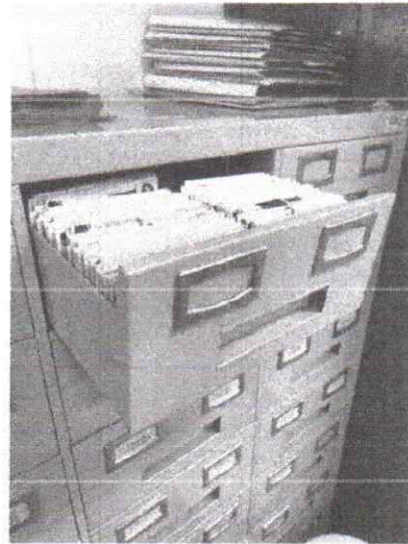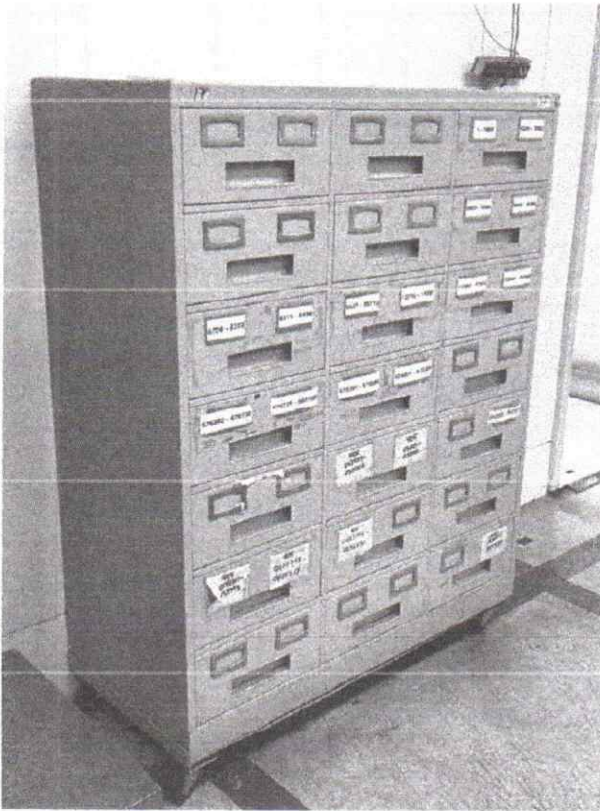

Signature Card Drawer
(Size of Signature Card : 5 ½" x 5")

Twenty-one (21) drawers, gauge #20 steel component in powder coated finish; with central locking mechanism and heavy duty wheel caster

- Color : Light Gray
- Dimension : 1041.4 mm (L) x 457.2 mm (W) x 1358.9 mm (H)

Note : Design should be same or similar as the attached photo.

TECHNICAL SPECIFICATION
200AT AUTOMATIC TRANSFER SWITCH

Specification:

- Ampere Trip Rating, Pole : 200AT, 3-Pole
- Phase : 3 Φ
- Ac Voltage Input Range : 160 to 230 V(AC)
- Frequency : 50/60Hz
- Generator Start Relay : 7a @ 250 V(AC) Max.
- Transfer To Normal Relay : 5A @ 250 V(AC) Max
- Transfer To Standby Relay : 5A @ 250 V(AC) Max
- Alarm Output Auxiliary Relay : 7A @ 250 V(AC) Max
- Power Supply : 12V/3A w/ back-up battery
- Proximity Card : EM 4102 ISO Blank card, 125KHz or equivalent

ADJUSTABLE TIMERS

- Time Delay Normal To Emergency (TDNE) : 0 to 250 Seconds
- Time Delay Engine Start (TDES) : 0 to 30 Seconds
- Time Delay Emergency To Normal (TDEN) : 0 to 999 Seconds
- Time Delay Engine Cool Down (Tdec) : 0 to 250 Seconds
- Time Delay – Off (TDOFF) : 0 to 99 Seconds
- Engine Exerciser Test Period (EETP) : 0 to 99 Seconds
- Exerciser Test Cycle (ETC) : 1 to 4 Weeks

FULL PHASE VOLTAGE & FREQUENCY MONITORING

- Over Voltage Adjustable Range : 210 to 290 V(AC)
- Under Voltage Adjustable Range : 160 to 240 V(AC)
- Over Frequency Adjustable Range : 51 to 75 Hz
- Under Frequency Adjustable Range : 40 to 59 Hz

FEATURES

- Micro-processor based
- Full phase voltage/frequency monitor & protection for normal & standby source
- Current time display on OFF mode
- TDEN/TDNE/TDEC/TDES/TDOF countdown display
- Internal program settings & status display
- Display Auto / OFF / Test status
- Over / Under voltage & Frequency alarm
- Over / Under voltage & frequency alarm

Note : Request quotation from prospective suppliers for evaluation on your end.